




# Q<sup>®</sup> SERIES

Serial Technology with 31 Available Color Settings: Single, Dual, Tri, Quad, & Quint.

Feniex Industries, Inc.  
1.800.615.8350

## Q<sup>®</sup> LINK

Controller

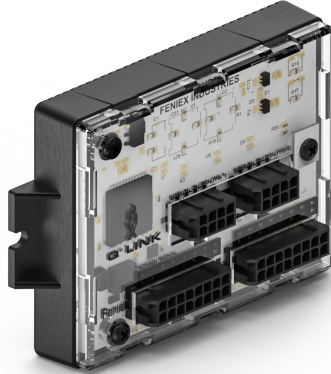

<b>PART #</b>	QLM-24
<b>DIMENSIONS</b>	3.95" x 2.6" x 0.75"
<b>VOLTAGE</b>	10-18VDC
<b>CURRENT DRAW</b>	5 Amps @ 12V
<b>INPUTS</b>	27 Inputs
<b>FLASH PATTERNS</b>	Over 20
<b>OPTICS</b>	-
<b>LED COLORS</b>	-
<b>LED COUNT</b>	-
<b>CABLE LENGTH</b>	1ft

### CERTIFICATIONS:



### DESCRIPTION:

Introducing Feniex Q<sup>®</sup> Link, the innovative serial device to connect all of your Q<sup>®</sup> Series lighthead. Specially engineered for use with Feniex's state-of-the-art serial technology, connect up to 48 lighthead using only one Q Link device. Our Q Link device uses Q Serial Zoning Technology to make programming your build easier than ever before. No need to tap mode wires, simply connect your Q Series lighthead to your Q Link device using the 2 serial wires and the Q Link Software.

- Zoning magnet included
- Includes 8 serial ports
- Each serial port supports up to 6 Q Serial lighthead
- Syncs up to 48 lighthead using one Q Link device
- Computer programmable with Q Link Software



Anti-yellowing & anti-cracking clear-coated polycarbonate lens



Military-grade aluminum