

# 4200 CONTROLLER



**PART NUMBER: C-4200-DL**

## KEY FEATURES:

- 18 programmable buttons:
  - On/Off
  - Momentary
  - Timer
- Computer programmable using a USB port
  - Free software downloads
- Bluetooth wireless control option available for both Android and Apple devices
- Kit includes: U-shaped mounting bracket, USB wire and 2 RJ45 cables
- Console Face plates available with Havis, Jotto and Troy
- Universal compatible with most light or siren product


## QUICK FACTS:

- Made in the USA
- Certification: SAE J1113-11
- Capabilities:
  - 3 position slide switch
  - 2 channel integrated wigwag
  - 18 programmable 10 amp outputs
  - Programmable Ignition activation
  - Programmable night mode activation
  - Programmable Day mode activation
  - 2 programmable 12V- inputs

## SPECIFICATIONS:

Relay Dimensions	<b>6.3" L x 3.3" W x 1.5" H</b>
Controller Dimensions	<b>6.8" L x 3.5" W x 1.3" H</b>
Warranty	<b>2 years</b>
RJ45 Harness Length	<b>15 feet</b>
Voltage	<b>12 VDC</b>
Max Current Output	<b>60A (fuse @125%)</b>
Fuse	<b>125% of circuit draw</b>

## WIRING DIAGRAM:

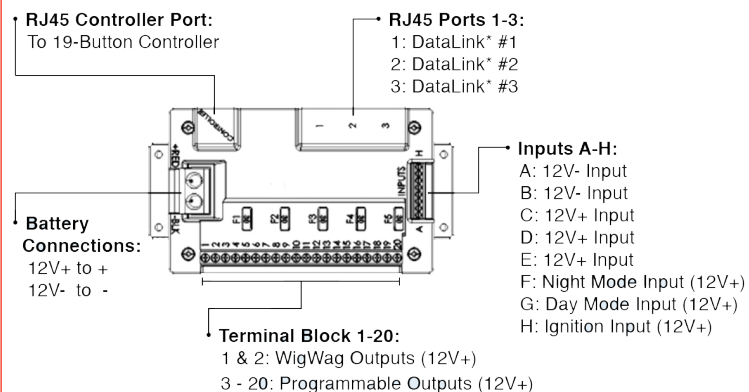

\*DataLink enables communication with compatible sirens & lightbars